

Job/Project \_\_\_\_\_  
 Location \_\_\_\_\_  
 Fixture Ref. \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 Remarks \_\_\_\_\_

### Product Description

Use high-performance SMD LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

### Luminaire

Structure Fixed Down Light LED  
 Model No. IBDL226  
 Wattage 15 W | 20W | 25W | 35W | 42W  
 Luminous Flux > 1350lm | 1800lm | 2250lm | 3150lm | 3780lm  
 Beam 80°  
 IP Ratings IP20  
 Material Die-casting alu. trim and heatsink, PMMA. lens  
 Finish Matt white or black trim

### Picture



### Installation

Suitable for 5-18 mm thick ceiling board

### LEDs

Brand Osram | Sanan  
 Type SMD  
 Color Temp 2700K | 3000K | 3500K | 4000K  
 5000K | 5700K | 6500K  
 CRI 80 | 90




### Control Gear


Remote constant current LED driver  
 Brand Lifud | Eaglerise | OEM  
 Input Voltage 220~240Vac | 100240Vac  
 Dimming Non Dim | Dim  
 Remarks Flicker-free, PF 0.5 | 0.9




### Photometrics



Ra>80



### Line art

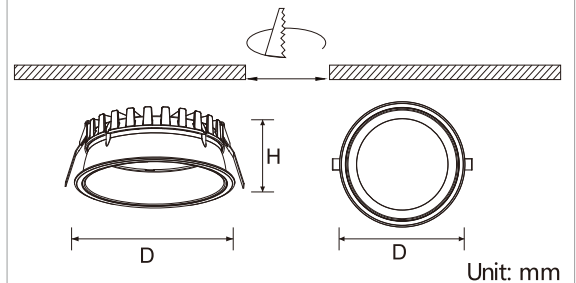

Unit: mm

Model	Watts	D xH(mm)	Cutout(mm)
IBDL226CT090	15W	Ø 104×H69mm	Ø 90-95mm
IBDL226CT090-CCT	15W	Ø 104×H69mm	Ø 90-95mm
IBDL226CT115	20W	Ø 129×H69mm	Ø 115-120mm
IBDL226CT115-CCT	20W	Ø 129×H69mm	Ø 115-120mm
IBDL226CT140	25W	Ø 155×H74mm	Ø 140-145mm
IBDL226CT140-CCT	25W	Ø 155×H74mm	Ø 140-145mm
IBDL226CT175	35W	Ø 190×H74mm	Ø 170-178mm
IBDL226CT175-CCT	35W	Ø 190×H74mm	Ø 170-178mm
IBDL226CT200	42W	Ø 220×H84mm	Ø 200-208mm
IBDL226CT200-CCT	42W	Ø 220×H84mm	Ø 200-208mm